

ABD-06M-V16

Outline and mounting dimensions


Assembly 1:1 / Dimensions in mm

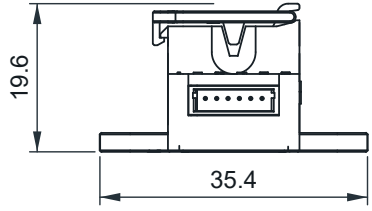

CONNECTOR SIDE



SIDE VIEW

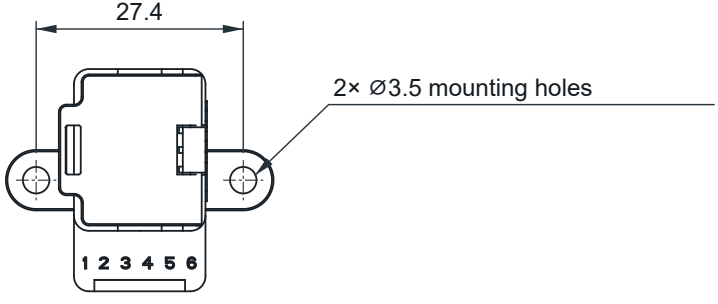

TOP VIEW

Tubing OD ⌀1.6 mm

Connector S6B-ZR-SM4A-TF

Mating face 2:1



PIN	SIGNAL	FUNCTION
1	VCC	5V DC
2	GND	Ground
3	OUT	0–5 V analog
4	RX	TTL
5	TX	TTL
6	OUT	High-level alarm, pull-up required

Pin 6: applied voltage <25 V / sink current <50 mA